

# 15KP17-15KP280

## 15000W TRANSIENT VOLTAGE SUPPRESSOR

### FEATURES

- Axial and radial available as “HR” (high reliability) screened per MIL-PRF-19500, JANTX level. Add “HR” suffix to base part number
- Available as non-RoHS (Sn/Pb plating), standard, and as RoHS by adding “-PBF” suffix.
- Available in both axial leaded and radial packages (“R” prefix for radial packages)
- Selections for 170 to 280 volts standoff voltage
- Suppresses transients up to 15000 watts @ 10/10000µs and 100000 watts @ 8/20µs
- Fast response

### MAXIMUM RATINGS

Rating	Value
Peak Pulse Power Dissipation @ 25°C	15000 watts at 10/1000µs
Impulse Repetition Rate (Duty factor)	0.05%
t <sub>clamping</sub> (0 volts to V <sub>(BR)</sub> min):	< 100ps theoretical for unidirectional and < 5 ns for bidirectional
Operating and Storage Temperature:	-65 to +150°C
Thermal Resistance:	20°C/W junction to lead or 80°C/W junction to ambient when mounted on FR4 PC board with 4mm <sup>2</sup> copper pads and track width 1 mm, length 25 mm
Steady-State Power dissipation:	6 watts at T <sub>L</sub> = 30°C or 1.56 watts at T <sub>A</sub> = 25°C when mounted on FR4 PC board described for thermal resistance
Forward Surge Voltage:	200A, 8.3 ms half-sine wave
Solder Temperatures:	260°C for 10 s (maximum)

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise specified)

Part Number	Reverse Stand-Off Voltage V <sub>WM</sub> <sup>(1)</sup>	Breakdown Voltage V <sub>(BR)</sub>		Maximum Clamping Voltage V <sub>C</sub> @ I <sub>PP</sub>	Maximum Standby Current I <sub>D</sub> @ V <sub>WM</sub>	Maximum Peak Pulse Current I <sub>PP</sub>	Maximum Temperature Coefficient of V <sub>(BR)</sub> α <sub>V(BR)</sub>
		V <sub>(BR)</sub> @	I <sub>(BR)</sub>				
		Volts	mA				
15KP17	17	18.9	50	32.3	5000	464	19
15KP17A	17	18.9	50	29.3	5000	512	17
15KP18	18	20.0	50	34.2	5000	439	20
15KP18A	18	20.0	50	30.9	5000	485	18
15KP20	20	22.2	20	37.9	1500	396	24
15KP20A	20	22.2	20	34.3	1500	437	21
15KP22	22	24.4	10	41.1	500	365	27
15KP22A	22	24.4	10	37.1	500	404	24
15KP24	24	26.7	5	45.0	150	333	30
15KP24A	24	26.7	5	40.7	150	369	27
15KP26	26	28.9	5	48.7	50	308	32
15KP26A	26	28.9	5	44.0	50	341	29
15KP28	28	31.1	5	52.4	25	286	35
15KP28A	28	31.1	5	47.5	25	316	31
15KP30	30	33.3	5	56.2	15	267	27
15KP30A	30	33.3	5	50.7	15	296	34
15KP33	33	36.7	5	66.0	10	227	46

# 15KP17-15KP280

## 15000W TRANSIENT VOLTAGE SUPPRESSOR

Part Number	Reverse Stand-Off Voltage $V_{WM}^{(1)}$	Breakdown Voltage $V_{(BR)}$		Maximum Clamping Voltage $V_C @ I_{PP}$	Maximum Standby Current $I_D @ V_{WM}$	Maximum Peak Pulse Current $I_{PP}$	Maximum Temperature Coefficient of $V_{(BR)}$ $\alpha_{V(BR)}$
		$V_{(BR)}$ @	$I_{(BR)}$				
	Volts	Volts	mA	Volts	$\mu A$	A	mV/°C
15KP33A	33	36.7	5	54.8	10	274	38
15KP36	36	40.0	5	66.0	10	227	46
15KP36A	36	40.0	5	59.7	10	251	41
15KP40	40	44.4	5	72.8	10	206	51
15KP40A	40	44.4	5	65.8	10	228	46
15KP43	43	47.8	5	77.1	10	195	55
15KP43A	43	47.8	5	69.7	10	215	50
15KP45	45	50.0	5	80.7	10	186	57
15KP45A	45	50.0	5	73.0	10	205	52
15KP48	48	53.3	5	85.9	10	175	62
15KP48A	48	53.3	5	77.7	10	193	56
15KP51	51	56.7	5	91.5	10	164	66
15KP51A	51	56.7	5	82.8	10	181	60
15KP54	54	60.0	5	96.8	10	155	70
15KP54A	54	60.0	5	87.5	10	171	63
15KP58	58	64.4	5	104.0	10	144	76
15KP58A	58	64.4	5	94.0	10	160	68
15KP60	60	66.7	5	107.0	10	140	78
15KP60A	60	66.7	5	97.3	10	154	71
15KP64	64	71.1	5	115	10	130	84
15KP64A	64	71.1	5	104	10	144	76
15KP70	70	77.8	5	126	10	119	92
15KP70A	70	77.8	5	114	10	132	83
15KP75	75	83.3	5	135	10	111	100
15KP75A	75	83.3	5	122	10	123	89
15KP78	78	86.7	5	140	10	107	104
15KP78A	78	86.7	5	126	10	119	93
15KP85	85	94.4	5	152	10	99	113
15KP85A	85	94.4	5	137	10	109	102
15KP90	90	100	5	160	10	94	120
15KP90A	90	100	5	146	10	103	109
15KP100	100	111	5	179	10	84	134
15KP100A	100	111	5	162	10	93	121
15KP110	110	122	5	196	10	77	147

# 15KP17-15KP280

## 15000W TRANSIENT VOLTAGE SUPPRESSOR

Part Number	Reverse Stand-Off Voltage $V_{WM}^{(1)}$	Breakdown Voltage $V_{(BR)}$		Maximum Clamping Voltage $V_C @ I_{PP}$	Maximum Standby Current $I_D @ V_{WM}$	Maximum Peak Pulse Current $I_{PP}$	Maximum Temperature Coefficient of $V_{(BR)}$ $\alpha_{V(BR)}$
		$V_{(BR)}$ @	$I_{(BR)}$				
	Volts	Volts	mA	Volts	$\mu A$	A	mV/°C
15KP110A	110	122	5	178	10	84	133
15KP120	120	133	5	214	10	70	161
15KP120A	120	133	5	193	10	78	145
15KP130	130	144	5	231	10	65	174
15KP130A	130	144	5	209	10	72	157
15KP150	150	167	5	268	10	56	202
15KP150A	150	167	5	243	10	62	183
15KP160	160	178	5	287	10	52	216
15KP160A	160	178	5	259	10	58	195
15KP170	170	189	5	304	10	49	229
15KP170A	170	189	5	275	10	55	207
15KP180	180	200	5	321	10	47	242
15KP180A	180	200	5	291	10	52	219
15KP200	200	222	5	356	10	42	269
15KP200A	200	222	5	322	10	47	243
15KP220	220	245	5	393	10	38	297
15KP220A	220	245	5	356	10	42	269
15KP240	240	267	5	428	10	35	324
15KP240A	240	267	5	38/8	10	39	293
15KP260	260	289	5	464	10	32	352
15KP260A	260	289	5	419	10	36	317
15KP280	280	311	5	500	10	30	378
15KP280A	280	311	5	452	10	33	342

Note 1: Transient voltage suppressors are normally selected with reverse "Stand-Off Voltage"  $V_{WM}$  which should be equal or greater than the dc or continuous peak operating voltage level.

Note 2: For bidirectional construction, indicate C or CA suffix after the part number.

### SYMBOLS AND DEFINITIONS


Symbol	Definition	Symbol	Definition	Symbol	Definition
$V_{WM}$	Working peak (stand-off voltage)	$I_{PP}$	Peak pulse current	$I_D$	Standby current
$P_{PP}$	Peak pulse power	$V_C$	Clamping voltage		
$V_{BR}$	Breakdown voltage	$I_{(BR)}$	Breakdown current for $V_{(BR)}$		

# 15KP17-15KP280

## 15000W TRANSIENT VOLTAGE SUPPRESSOR


### MECHANICAL CHARACTERISTICS

<b>Case</b>	Digi I
<b>Marking</b>	Body-painted, alpha numeric
<b>Polarity</b>	Cathode band. Bidirectional not marked for polarity.

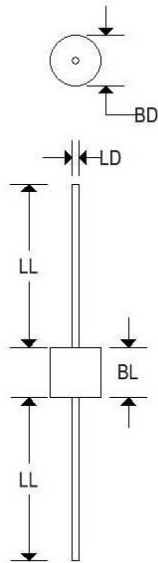

	Digi I			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	0.340	0.360	8.600	9.100
BL	0.340	0.360	8.600	9.100
LD	0.047	0.053	1.194	1.346
LL	1.000	-	25.400	-


<b>Case</b>	5R
<b>Marking</b>	Body-painted, alpha numeric
<b>Polarity</b>	Cathode band. Bidirectional not marked for polarity.

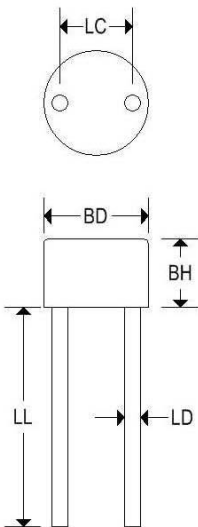


	Case 5R			
	Inches		Millimeters	
	Min	Max	Min	Max
BH	0.205	0.235	5.207	5.969
BD	0.340	0.360	8.636	9.144
LD	0.047	0.053	1.194	1.346
LL	0.750	-	19.050	-
LC	0.235	0.265	5.969	6.731

# 15KP17-15KP280


## 15000W TRANSIENT VOLTAGE SUPPRESSOR

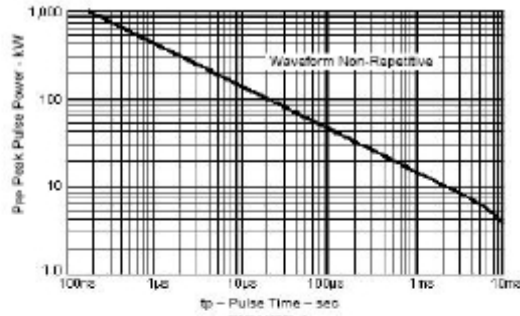

**FIGURE 1**  
Peak Pulse Power vs. Pulse Time to 50% of  
Exponentially Decaying Pulse

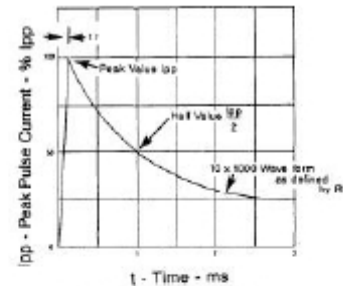

**FIGURE 2**  
Test waveform parameters:  
 $t_r=10 \mu s$ ,  $t_p=1000 \mu s$   
Pulse Waveform

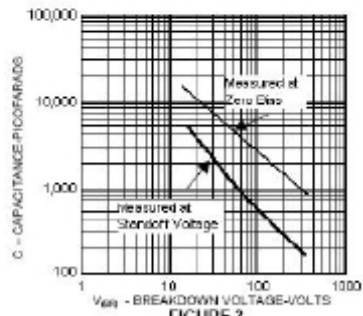

**FIGURE 3**  
Typical Capacitance vs. Breakdown Voltage