



High-reliability discrete products
and engineering services since 1977

UTR2305-UTR2360, UTR3305-UTR3360 UTR4305-UTR4360

FAST RECOVERY RECTIFIERS

FEATURES

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available as non-RoHS (Sn/Pb plating), standard, and as RoHS by adding "-PBF" suffix.

MAXIMUM RATINGS

Characteristic	2 amp series	3 amp series	4 amp series
Maximum average DC output current @ T _A = 25°C	2.0A	3.0A	4.0A
@ T _A = 100°C	1.0A	1.5A	2.0A
Non-repetitive sinusoidal Surge current (8.3ms)	60A	80A	100A
Operating temperature range	-195 to +175°C		
Storage temperature range	-195 to +200°C		

ELECTRICAL CHARACTERISTICS @ 25°C unless otherwise noted

Part number	Peak inverse voltage	Maximum forward voltage drop	Maximum leakage current @ PIV		Maximum reverse recovery time *	Maximum junction capacitance @ 25°C	
			25°C	100°C		0V	-10V
UTR4305	50V	1.1V @ 4A	5μA	100μA	250ns	600pF	240pF
UTR4310	100V					400pF	160pF
UTR4320	200V					320pF	128pF
UTR4340	400V				400ns	240pF	96pF
UTR4350	500V					200pF	80pF
UTR4360	600V					160pF	64pF
UTR3305	50V	1.1V @ 3A	5μA	100μA	250ns	600pF	240pF
UTR3310	100V					400pF	160pF
UTR3320	200V					320pF	128pF
UTR3340	400V				300ns	240pF	96pF
UTR3350	500V				350ns	200pF	80pF
UTR3360	600V				400ns	160pF	64pF
UTR2305	50V	1.1V @ 2A	5μA	100μA	250ns	600pF	240pF
UTR2310	100V					400pF	160pF
UTR2320	200V					320pF	128pF
UTR2340	400V				300ns	240pF	96pF
UTR2350	500V				350ns	200pF	80pF
UTR2360	600V				400ns	160pF	64pF

Recovery time is measured from 1A to 1A recovering to 0.5A.




High-reliability discrete products
and engineering services since 1977

UTR2305-UTR2360, UTR3305-UTR3360 UTR4305-UTR4360

FAST RECOVERY RECTIFIERS

MECHANICAL CHARACTERISTICS

Case	Digi B
Marking	Body painted, alpha-numeric
Polarity	Cathode band

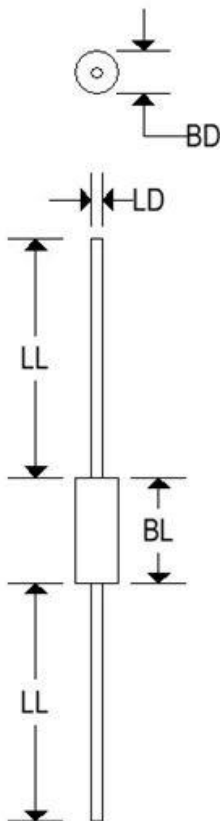

	Digi B			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	0.115	0.142	2.921	3.607
BL	0.130	0.260	3.302	6.604
LD	0.036	0.042	0.914	1.067
LL	1.000	1.500	25.400	38.100


BL includes slugs and uncontrolled area of the leads



High-reliability discrete products
and engineering services since 1977

UTR2305-UTR2360, UTR3305-UTR3360 UTR4305-UTR4360

FAST RECOVERY RECTIFIERS

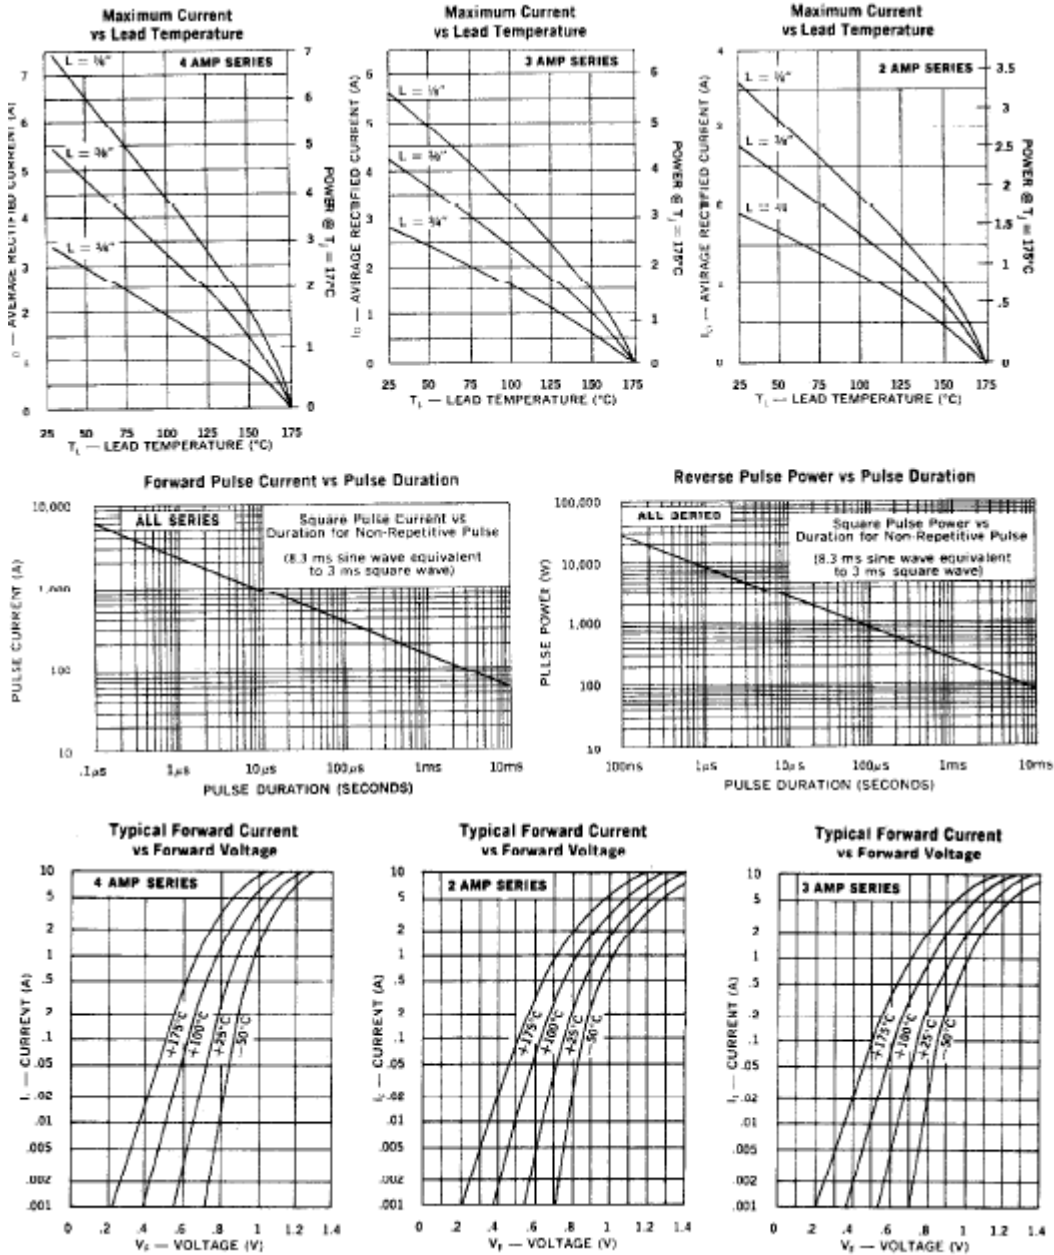



High-reliability discrete products
and engineering services since 1977

UTR2305-UTR2360, UTR3305-UTR3360 UTR4305-UTR4360

FAST RECOVERY RECTIFIERS

