



High-reliability discrete products  
and engineering services since 1977

# ZR01A

## Inverted Series Suppressor Network

### FEATURES:

- Designed for use as relay suppression circuit applications.
- Hermetically sealed glass ZR01A package.
- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available Non-RoHS (standard) or RoHS compliant (add PBF suffix).

### MAXIMUM RATINGS

Ratings	Symbol	Value	Unit
Zener diode power dissipation	P <sub>D</sub>	1.5	Watts
Rectifier maximum average forward current @ T <sub>A</sub> = 75°C	I <sub>AV</sub>	1.0	Amps
Rectifier maximum peak reverse voltage	V <sub>RWM</sub>	600	Volts
Storage temperature range	T <sub>stg</sub>	70 to +175	°C
Operating temperature range	T <sub>J</sub>	70 to +150	°C
Solder temperature	T <sub>SP</sub>	260 maximum 10sec	°C

### ELECTRICAL CHARACTERISTICS @ 25°C unless otherwise noted

Parameters	Symbol	Min	Max	Unit
Zener voltage I <sub>ZT</sub> = 1.5mA, T <sub>p</sub> = 10ms	V <sub>Z</sub>	33	39	Volts
Zener voltage I <sub>ZT</sub> = 1.5mA, T <sub>p</sub> = 10ms, T <sub>A</sub> = 125°C	V <sub>Z</sub>	36	43	Volts
Zener voltage I <sub>ZT</sub> = 1.5mA, T <sub>p</sub> = 10ms, T <sub>A</sub> = -55°C	V <sub>Z</sub>	30	38	Volts
Maximum zener reverse current V <sub>R</sub> = 24V	I <sub>R</sub>	0.1		µA
Minimum diode breakdown voltage I <sub>R</sub> = 20µA	V <sub>BR</sub>	600		Volts
Maximum diode reverse current V <sub>R</sub> = 480V	I <sub>R</sub>	1		µA





High-reliability discrete products  
and engineering services since 1977

# ZR01A

## Inverted Series Suppressor Network

### MECHANICAL CHARACTERISTICS

Case	ZR01A hermetically sealed glass
Marking	Body painted, alpha-numeric
Polarity	Cathode band

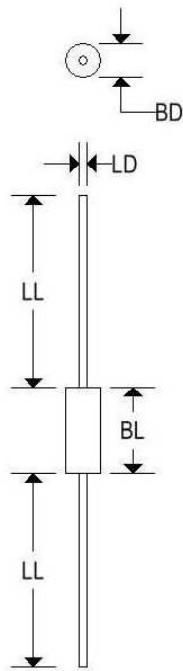

	ZR01A			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	-	0.095	-	2.413
BL	-	0.205	-	5.207
LD	0.017	0.023	0.432	0.584
LL	1.000	-	25.400	-