

# MUR470E-MUR4100E

### 4 AMP ULTRA FAST RECTIFIER

### **FEATURES**

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available as non-RoHS (Sn/Pb plating), standard, and as RoHS by adding "-PBF" suffix.

### **MAXIMUM RATINGS**

Rating	Symbol	MUR470E	MUR480E	MUR490E	MUR4100E	Unit
Peak repetitive reverse voltage Working peak reverse voltage DC blocking voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	700	800	900	1000	V
Average rectified forward current (square wave) Mounting method 3, per note 2	I <sub>F(AV)</sub>	4.0 @ T <sub>A</sub> = 35°C			А	
Non-repetitive peak surge current (surge applied at rated load conditions halfwave, single phase, 60Hz)	I <sub>FSM</sub>	70		А		
Operating and storage junction temperature range	$T_{J_r}T_{stg}$	-65 to +175		°C		
Maximum thermal resistance Junction to ambient	Reja	Note 1		°C/W		


### **ELECTRICAL CHARACTERSITICS** (T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	MUR470E	MUR480E	MUR490E	MUR4100E	Unit
Maximum instantaneous forward voltage $^{(1)}$ (I <sub>F</sub> = 3.0A, T <sub>J</sub> = 150°C) (I <sub>F</sub> = 3.0A, T <sub>J</sub> = 25°C) (I <sub>F</sub> = 4.0A, T <sub>J</sub> = 25°C)	V <sub>F</sub>		1	53 75 85		V
Maximum instantaneous reverse current (1) (Rated dc voltage, T <sub>J</sub> = 100°C) (Rated dc voltage, T <sub>J</sub> = 25°C)	I <sub>R</sub>			00 25		μΑ
Maximum reverse recovery time $(I_F=1.0A,di/dt=50A/\mu s) \\ (I_F=0.5A,I_R=1.0A,I_{REC}=0.25A)$	t <sub>rr</sub>			00 75		ns
Maximum forward recovery time (I <sub>F</sub> = 1.0A, di/dt = 100A/ $\mu$ s, recovery to 1.0V)	t <sub>fr</sub>			75		ns
Controlled avalanche energy	W <sub>AVAL</sub>		;	20		mJ



### MECHANICAL CHARACTERISTICS

Case	DO-201A
Marking	Body painted, alpha-numeric
Polarity	Cathode band



	DO-201A					
	Inc	hes	Millimeters			
	Min	Max	Min	Max		
BD	0.190	0.260	4.826	6.604		
BL	0.285	0.375	7.240	9.530		
LD	0.048	0.052	1.219	1.321		
LL	1.000	-	25.400	¥		

# MUR470E-MUR4100E



## MUR470E-MUR4100E

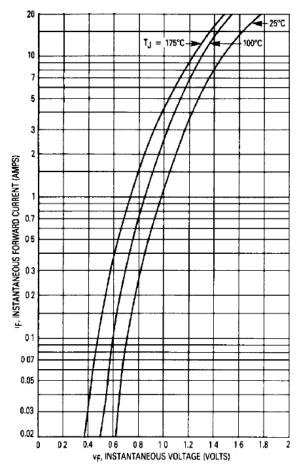


Figure 1. Typical Forward Voltage

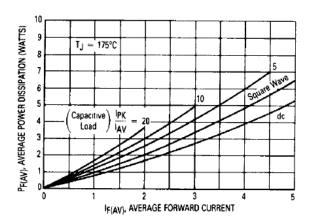


Figure 4. Power Dissipation

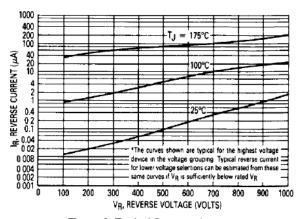


Figure 2. Typical Reverse Current\*

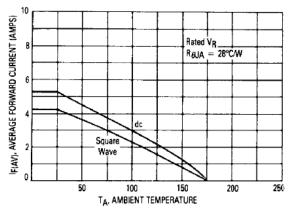


Figure 3. Current Derating (Mounting Method #3 Per Note 1)

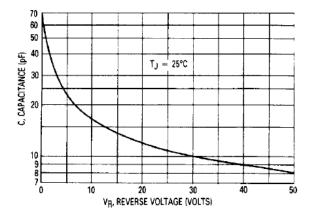


Figure 5. Typical Capacitance



# MUR470E-MUR4100E



# MERCURY SWITCH S1 Figure 6. Test Circuit

# MUR470E-MUR4100E

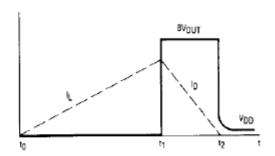


Figure 7. Current-Voltage Waveforms